

# Hybrid motor starter - ELR H3-I-PT- 24DC/500AC-0,6 - 2903920

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Hybrid motor starter for starting 3~ AC motors up to 500 V AC and 0.6 A output current, with 24 V DC control voltage, adjustable overload shutdown, and push-in connection.

The figure shows the ELR H3-IES-PT- 24DC/500AC-0,6 version

## Key commercial data

package_quantity	1
GTIN	4046356771436

## Technical data

### Device supply

Rated control circuit supply voltage $U_s$	24 V DC
Control supply voltage range	19.2 V DC ... 30 V DC
Rated control supply current $I_s$	40 mA
Type of protection	Surge protection
Type of protection	Reverse polarity protection

### Input data

Input name	Control input
Rated actuating voltage $U_c$	24 V DC
Triggering voltage range	19.2 V DC ... 30 V DC
Rated actuating current $I_c$	5 mA (Input type 1)
Switching threshold	9.6 V ("0" signal)
Switching threshold	19.2 V ("1" signal)
Typical turn-off time	< 30 ms
Type of protection	Reverse polarity protection

### Output data load output

Output name	AC output
Rated operating voltage $U_o$	500 V AC
Operating voltage range	42 V AC ... 550 V AC
Rated operating current $I_o$	0.6 A (AC-51)
Rated operating current $I_o$	0.6 A (AC-53a)
Mains frequency	50/60 Hz
Load current range	75 mA ... 600 mA (see to derating)

# Hybrid motor starter - ELR H3-I-PT- 24DC/500AC-0,6 - 2903920

## Technical data

### Output data load output

Trigger characteristic in acc. with IEC 60947-4-2	Class 10A
Cooling time	20 min. (for auto reset)
Leakage current	0 mA
Type of protection	Surge protection

### Output data reply output

Output name	Acknowledge output
Note	Confirmation: floating change-over contact, signal contact
Contact type	1 PDT
Switching capacity according to IEC 60947-5-1	3 A (230 V, AC15)
Switching capacity according to IEC 60947-5-1	2 A (24 V, DC13)

### General

Switching frequency	≤ 2 Hz (Load-dependent)
Mounting position	vertical (horizontal DIN rail, motor output below)
Mounting type	DIN rail mounting
Assembly instructions	alignable, for spacing see derating
Operating mode	100% operating factor
Maximum power dissipation	2.5 W
Minimum power dissipation	0.88 W
Operating voltage display	Green LED
Status display	Yellow LED
Indication	Red LED

### Connection data, input side

Connection name	Control circuits
Connection method	Push-in connection
Stripping length	10 mm
Conductor cross section solid	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section AWG	24 ... 14

### Connection data, output side

Connection name	Load circuit
Connection method	Push-in connection
Stripping length	10 mm
Conductor cross section solid	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section AWG	24 ... 14

### Ambient conditions

Ambient temperature (operation)	-25 °C ... 70 °C (observe derating)
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Degree of protection	IP20

# Hybrid motor starter - ELR H3-I-PT- 24DC/500AC-0,6 - 2903920

## Technical data

### Dimensions

<b>Width</b>	22.5 mm
<b>Height</b>	99 mm
<b>Depth</b>	114.5 mm

### UL data

<b>SCCR</b>	100 kA (500 V AC (fuse: 30 A class CC/30 A class J (high fault)))
<b>SCCR</b>	5 kA (500 V AC (fuse: 20 A RK5 (standard fault)))
<b>FLA</b>	0.6 A (500 V AC)
<b>Group installation</b>	20 A (class RK5, SCCR 5kA, #24 - 14 AWG max. solid and stranded)
<b>Group installation</b>	30 A (class CC or J, SCCR 100kA, #24 - 14 AWG max, solid and stranded)
<b>Category code</b>	NLDX / NRNT

### Insulation characteristics

<b>Rated insulation voltage</b>	500 V
<b>Rated surge voltage</b>	6 kV
<b>Overvoltage category</b>	III
<b>Degree of pollution</b>	2
<b>Designation</b>	Insulation characteristics between the control input and control supply voltage, and auxiliary circuit to the main circuit
<b>Insulation</b>	Safe isolation (IEC 60947-1) at operating voltage ≤ 300 V AC (e.g., 230/400 V AC, 277/480 V AC)
<b>Insulation</b>	Safe isolation (EN 50178) at operating voltage ≤ 300 V A (e.g., 230/400 V AC, 277/480 V AC)
<b>Insulation</b>	Basic isolation (IEC 60947-1) at operating voltage 300 ... 500 V AC
<b>Insulation</b>	Safe isolation (EN 50178) at operating voltage 300 ... 500 V AC
<b>Designation</b>	Isolation characteristics between the control input and control supply voltage to auxiliary circuit
<b>Insulation</b>	Safe isolation (IEC 60947-1) in the auxiliary circuit ≤ 300 V AC
<b>Insulation</b>	Safe isolation (EN 50178) in the auxiliary circuit ≤ 300 V AC

### Standards and Regulations

<b>Designation</b>	Standards/regulations
<b>Standards/regulations</b>	IEC 60947-1
<b>Standards/regulations</b>	IEC 60947-4-2
<b>Standards/regulations</b>	IEC 61508
<b>Standards/regulations</b>	ISO 13849

### Approvals/conformities

<b>UL certificate</b>	NLDX.E228652
-----------------------	--------------

### Environmental Product Compliance

<b>China RoHS</b>	Environmentally Friendly Use Period = 50
<b>China RoHS</b>	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

# Hybrid motor starter - ELR H3-I-PT- 24DC/500AC-0,6 - 2903920

## Classifications

### eCl@ss

eCl@ss 5.0	27024002
eCl@ss 5.1	27024002
eCl@ss 6.0	27024002
eCl@ss 7.0	27024002
eCl@ss 8.0	27024002
eCl@ss 9.0	27024002

### ETIM

ETIM 2.0	EC001037
ETIM 3.0	EC001037
ETIM 4.0	EC001037
ETIM 5.0	EC001037
ETIM 6.0	EC001037

### UNSPSC

UNSPSC 6.01	30211915
UNSPSC 7.0901	39121514
UNSPSC 11	39121514
UNSPSC 12.01	39121514
UNSPSC 13.2	25173902


## Approvals

---

UL Listed / cUL Listed / IECCEB Scheme / UL Listed / cUL Listed / CCC-s / cULus Listed /

---

### Approval details

UL Listed 
cUL Listed 
IECEE CB Scheme 


CCC-s
cULus Listed 

## Hybrid motor starter - ELR H3-I-PT- 24DC/500AC-0,6 - 2903920

### Accessories

#### Loop bridge

BRIDGE-PT 2 - 2904490



BRIDGE-PT 3 - 2904491



BRIDGE-PT 4 - 2904492



BRIDGE-PT 5 - 2904493



BRIDGE-PT 6 - 2904494



## Hybrid motor starter - ELR H3-I-PT- 24DC/500AC-0,6 - 2903920

### Accessories

BRIDGE-PT 7 - 2904495



---

BRIDGE-PT 8 - 2904496



---

BRIDGE-PT 9 - 2904497



---

BRIDGE-PT 10 - 2904498



---

### Cover

BRIDGE COVER - 2906240



---

### Device marking

# Hybrid motor starter - ELR H3-I-PT- 24DC/500AC-0,6 - 2903920

## Accessories

US-EMLP (15X5) - 0828790




UC-EMLP (15X5) - 0819301




## Drawings

### Block diagram

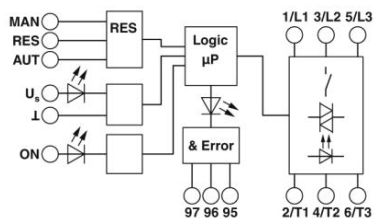

### Diagram

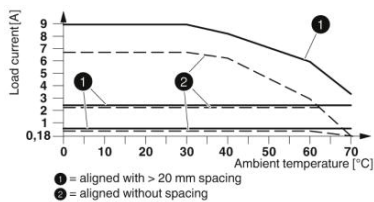

### Derating diagram

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>