

MS-104-3



MS-104-3

Micro Reed Sensor
pitch 10.16 mm

Electrical Characteristics @ 25 °C

Contact form		A
Contact rating max.	W / VA	10
Switching voltage max.	VDC	150
	VAC	120
Switching current max.	A	0.5
Carry current max.	A	0.7
Breakdown voltage min.	VDC	200
Total resistance max. (initial)	mΩ	200
Insulation resistance min.	Ω	10 ⁹

Features

- > Ultra miniature size
- > Mechanically protected
- > Various sensitivity ranges available
- > Customized types available

Magnetical Characteristics (of unmodified Reed Switch) @ 25 °C

Pull in range available	AT	10 - 20
Drop out min.	AT	4
Test coil	TC -	010
Test equipment tolerance	± AT	1

Operating Characteristics (of unmodified Reed Switch) @ 25 °C

Switching frequency max.	Hz	600
Resonant frequency typ.	Hz	12000
Operate time max. (incl. bounce)	ms	0.3
Release time max.	ms	0.1

Environmental Characteristics

Operating temperature	°C	-20 to + 85
Vibration (50-2000 Hz)	g	10
Shock (1/2 sin 11 ms)	g	50


Approvals

RoHS

REACH

CE US

Dimensions in mm

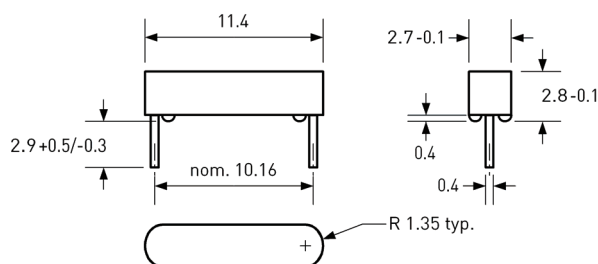

Ordering Information

Packing Unit	400 pcs
Weight per piece	0.12 g
Weight per package	58 g
Standard AT Ranges	
	1= 10 to 15 AT
	2= 15 to 20 AT

Ordering Example

MS-104-3-1 describes MS-104-3 with 10 to 15 AT.

MS-104-3




MS-104-3

Micro Reed Sensor
pitch 10.16 mm

Material Information

	Material	Colour
Housing	PA66, 25% GF	black
Potting compound	Epoxy	black

Test Procedure of final Reed Sensor

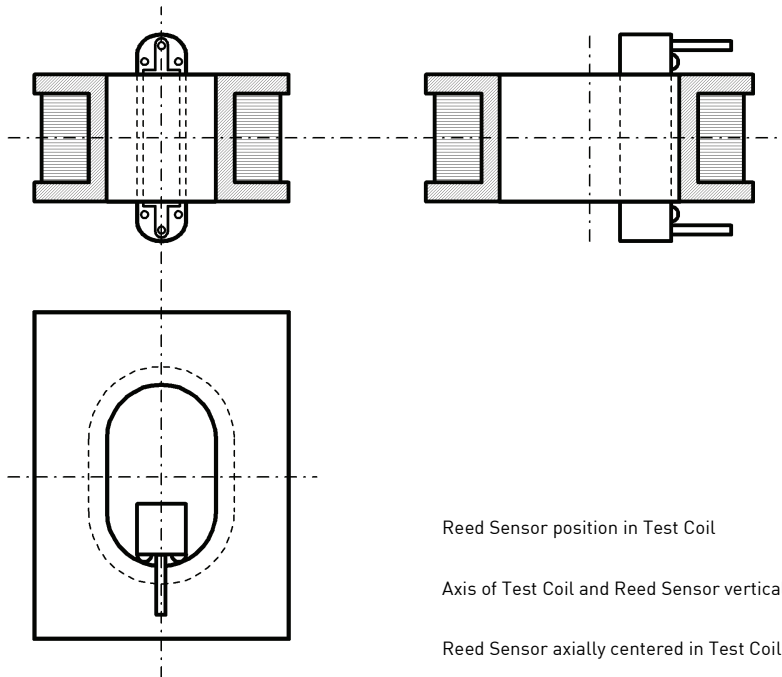

- Reed Sensor position in Test Coil
- Axis of Test Coil and Reed Sensor vertical
- Reed Sensor axially centered in Test Coil
- Leads of Reed Sensor fixed by test jig

Test Parameters

Test coil	TC-308
Test programs	
AT range	Test program
1 =	MS-104-3-1
2 =	MS-104-3-2

Remarks

When mounted onto ferromagnetic parts switching distance of MS-104-3 may reduce.
Electromagnetical influences and magnetic fields may change the switching behaviour of the sensor.